

(19) World Intellectual Property Organization
International Bureau

08 DEC 2004


(43) International Publication Date
18 December 2003 (18.12.2003)

PCT

(10) International Publication Number
WO 03/103977 A1

- (51) International Patent Classification⁷: **B41M 1/24**, 3/00, B41F 19/02, B41M 3/14
- (21) International Application Number: PCT/IB03/01977
- (22) International Filing Date: 23 May 2003 (23.05.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2002/4640 10 June 2002 (10.06.2002) ZA
- (71) Applicant (for all designated States except US): **NAM-PAK PRODUCTS LIMITED** [ZA/ZA]; 114 Dennis Road, Atholl Gardens, Sandton, 2196 Johannesburg, Gauteng Province (ZA).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **ELBERS, Caspar, Marinus, Theodorus** [NL/ZA]; 5 Hillside Road, Everton, 3610 Kwazulu-Natal Province (ZA).
- (74) Agent: **SCHWEIZER, Adrian, Victor, van**; Adams & Adams, 23 Wellington Road, 3rd Floor, Parktown, Johannesburg (ZA).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PRINTED, EMBOSSED AND METALLIZED MATERIAL

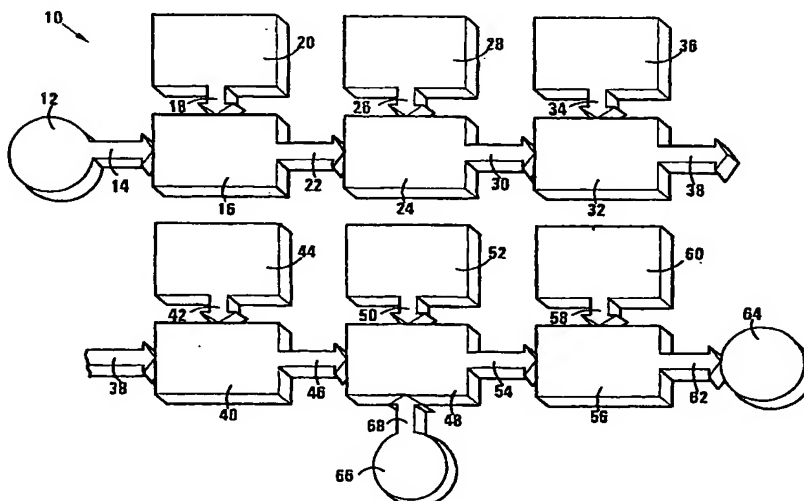

(57) Abstract: The invention provides a process for producing printed material comprising an elongated web of flexible sheet material. The process includes the process steps of printing an embossing coating on at least a portion of a surface of a major face of a web of the sheet material, embossing the embossing coating printed on the major face by means of an optically variable device, and metallising at least a portion of the surface of the major face with a metal coating. The invention also provides an apparatus or installation 10 for producing the printed material. The apparatus or installation 10 comprises a plurality of process stations which include an embossing coating printing station 24, an embossing station 32, and a metallising station 40. Further, the invention provides a flexible printed material comprising a web of flexible sheet material, whenever produced by the process or apparatus or installation 10 according to the invention.

PRINTED, EMBOSSED AND METALLIZED MATERIAL

THIS INVENTION relates to printed material. More particularly, the invention relates to a process for producing printed material suitable for, but not limited to, packaging. The invention also relates to an apparatus or installation for producing such printed material, and to a flexible printed material whenever produced in accordance with the process or by means of the apparatus or installation.

According to the invention there is provided a process for producing printed material comprising an elongated web of flexible sheet material, the process including the process steps of:

- printing an embossing coating on at least a portion of a surface of a major face of a web of said sheet material;

- embossing the embossing coating printed on said major face by means of an optically variable device; and

- metallising at least a portion of said surface of said major face with a metal coating,

the printing and the embossing being carried out in-line and continuously until a desired length of the surface or web has been embossed, the web being advanced past a series of work stations where the in-line process steps are respectively carried out, the series including a printing station where the printing of the embossing coating takes place and an embossing station, following the printing station, where the embossing takes place, to produce a web of flexible sheet material having a major face which is at least partially embossed, at least a portion of said major face being

metallised.

In a particular embodiment of the method, the printing of the embossing coating may be on a portion of said surface of said major face, the metallising being of the entire surface of said major face and taking place after the embossing, to produce a web of flexible sheet material having a major face which is partially embossed, the whole of said major face being metallised. Naturally, instead, only part of the major face need be metallised. More particularly, the flexible sheet material may be a transparent flexible polymeric plastics film.

The process may include the further step of colour-printing said major face of the web, the colour-printing being carried out continuously and in-line with the printing of the embossing coating and in-line with the embossing. Preferably, the colour-printing is confined to at least one unembossed portion of the surface of said major face.

The colour-printing may be by means of a printing cylinder using a gravure printing technique, although any other suitable printing technique can naturally be employed instead. Preferably, the colour-printing cylinder forms part of a gravure printing press.

In particular, the colour-printing may be carried out prior to the printing of the embossing coating.

In other words, the colour-printing may be carried out prior to the metallising and optionally prior to the printing of the embossing coating, between the

printing of the embossing coating and the embossing, or after the embossing, the colour-printing being carried out in-line with the printing of the embossing coating and in-line with the embossing, preferably being confined to the unembossed portion of the surface of said major face. In this regard, the embossed portion and/or the unembossed portion may extend continuously along the full length of the web, or one or both of these portions may be divided into separate parts, which may be spaced from one another; and the embossing and/or the arrangement of the portions may be such as to provide the embossed web with one or more repeating patterns. In this context colour-printing includes printing with pigments which are white, black or grey, although these are not strictly speaking colours.

More particularly, the metallising step and any additional process steps, other than in-line printing and embossing steps, may be carried out batchwise.

The embossing by means of an optically variable device may be selected from the group consisting of holographic embossing (two- or three-dimensional), stereographic embossing (to produce stereographs), diffraction grating embossing (by means of diffraction gratings), dot matrix embossing and combinations thereof (using various optically variable devices). Preferably, the embossing is holographic embossing. In particular, as indicated above, the embossing may be such as to provide the embossed web with an at least partially repeating embossed pattern.

The process may also include the further process step of laminating the embossed metallised web with a backing web of flexible sheet material, to provide a laminated composite material, in which the embossing, the metal coating and any colour-printing are sandwiched between the webs so that the embossed metallised

web is reverse-printed, at least one of the webs being transparent. The film of flexible sheet material of the backing web, like the flexible sheet material of the embossed metallised web, may, but need not be, transparent. Thus, the step of laminating the embossed metallised web with a backing web may, for example, be by adhesively securing the webs together by means of an adhesive, to provide the laminated composite material. Further, the process may include the steps of slitting the embossed metallised web lengthwise into at least two strips, and rolling said strips into rolls. Naturally, instead of being rolled into rolls, the strips may be cut transversely into individual sheets.

In other words, the process may include the further process step of laminating the embossed metallised web with a backing web of flexible sheet material, which may or may not be of flexible polymeric plastics film, and may or may not be transparent, for example by adhesively securing the webs together by means of an adhesive, to provide a laminated composite printed material, in which the embossed coating, the metal coating and any colour-printing are sandwiched between the webs so that the embossed metallised web is reverse-printed, the laminated composite material typically being slit lengthwise prior to finally being rolled into rolls or cut transversely into individual sheets.

While each of said webs may naturally be made of paper or flexible board, each said web is preferably made of a polymeric material selected from the group consisting of polyesters, polypropylenes, polyethylenes and polyvinyl chlorides, and mixtures, blends and copolymers thereof. Preferably, the polymeric material is selected from polystyrenes and polypropylenes, the metallising being by vacuum metallising.

In particular, the metallising step may be carried out by means of aluminium, although, naturally, other metals and other metallising techniques can, if desired, be used.

The embossing coating may be solvent-based, the embossing coating being printed by means of a printing cylinder. Instead, the embossing coating can be water-based, or indeed solvent-free. Preferably, the embossing coating is provided by the printing cylinder using a gravure printing technique, the cylinder forming part of a gravure printing press. In other words, a gravure printing technique may be employed, the cylinder forming part of a gravure printing press, for example, a rotogravure printing press.

Similarly, the embossing may be by means of an embossing cylinder, carrying a holographically engraved printing surface. The engraved printing surface may be engraved on the cylinder itself, or may be provided by one or more holographically engraved shims mounted on the embossing cylinder. Preferably, the embossing cylinder also forms part of a gravure printing press, preferably the same press as comprises the cylinder used for printing the embossing coating. When colour-printing is employed, this may likewise be by means of a printing cylinder and may employ a gravure printing technique, this printing cylinder conveniently being part of the same gravure press of which the cylinders for printing the embossing coating and for embossing the embossing coating also form part, so that a single gravure press is employed for the process. In this case, if an eight-colour gravure printing press is used, up to six of its cylinders can be used for colour-printing, at separate stations, all in-line, separate and distinct from the embossing coating printing

station and the embossing station.

More particularly, as indicated above, the embossing step and each printing step may be carried out by separate cylinders forming part of a single gravure printing press.

The invention extends to an apparatus or installation for producing printed material, the apparatus or installation comprising a plurality of processing stations, the processing stations including:

- an embossing coating printing station for printing an embossing coating on at least a portion of a surface of a major face of an elongated web of flexible sheet material;

- an embossing station for embossing the embossing coating printed on the web at the printing station; and

- a metallising station for metallising at least a portion of said surface of said major face,

the printing station and the embossing station being arranged in-line, and the apparatus or installation being arranged and constructed to advance an elongated web of flexible sheet material in succession past said printing station and said embossing station.

Conveniently the apparatus or installation is arranged and constructed to advance the elongated web of flexible sheet material past the embossing station and then to the metallising station, to facilitate metallising the entire surface of said major face, or part thereof.

The apparatus or installation may include at least one colour-printing station, arranged in-line with the embossing coating printing station and the embossing station, for colour-printing a coloured coating on an uncoated portion of the surface of said major face.

Each processing station, other than said printing stations and embossing station, may be arranged for batchwise processing of the web.

In a convenient embodiment of the apparatus or installation, each printing station and the embossing station may form part of a single gravure printing press having a plurality of cylinders, each printing station and the embossing station being arranged in-line and each comprising one of the cylinders of the press.

The metallising station may comprise a vacuum-metallising station, for vacuum-metallising the major face, with a metal such as aluminium.

The apparatus or installation may also include a laminating station for laminating said major face of the web, after the metallising, to a backing web of flexible sheet material; the apparatus or installation including an optional slitting station for slitting the metallised web into portions, and an optional rolling station for rolling each metallised web or web portion up into at least one roll. Naturally, instead, the rolling station may be replaced by a cutting station for cutting each metallised web or web portion into individual sheets.

The invention extends to flexible printed material comprising a web of flexible sheet material, for example transparent polymeric plastics film, whenever

produced by the process described above, and/or whenever produced by means of the apparatus or installation described above.

In particular, the web may comprise an embossed portion and an unembossed portion which respectively extend continuously along the full length of the web. Preferably, the embossed portion and unembossed portion are divided into separate parts, the parts being spaced from one another and alternating along the length of the web.

The portions may be arranged such as to provide the web with at least one repeating pattern.

While the invention naturally contemplates using webs which are embossed and metallised, and backing webs, which are of paper or flexible board, the web which is embossed and metallised, and any backing web used, are conveniently made from a member selected from the group of polymeric plastics materials consisting of polyesters, polypropylenes, polyethylenes, and polyvinyl chlorides, and mixtures, blends and copolymers thereof.

In a particular embodiment of the invention, the flexible printed material may be in the form of at least one bank note.

In another particular embodiment of the invention, the flexible printed material may be in the form of a packaging material.

The invention will now be described, by way of non-limiting illustrative

example, with reference to the accompanying diagrammatic drawing, in which the single Figure shows a schematic flow diagram of a process according to the present invention.

In the drawing, in which the flow diagram of the present invention is generally designated by reference numeral 10, a plurality of process stages or work stations are illustrated, interconnected by a plurality of flow paths or flow lines along which materials undergoing the process of the present invention are moved, to and past the various stations. Process steps are carried out at the various stations, which are shown associated with items of process equipment, connected thereto by process lines, indicating the process steps which are carried out thereby. Reference numeral 10 thus generally designates an apparatus or installation for carrying out the process of the present invention.

The installation 10 comprises a supply or store 12 of unprinted flexible sheet material such as polyester (PET), bi-axially oriented polypropylene (BOPP), polyvinyl chloride (PVC), paper, flexible board or the like, in the present example, say, PET. The store 12 is shown connected by flow line 14 to a colour-printing station 16 which receives process input, designated by process line 18, from a printing cylinder 20 of a rotogravure printing press. Flow line 22 then leads from station 16 to an embossing coating printing station 24, which receives process input, designated by process line 26, from a further printing cylinder 28 of said rotogravure printing press.

From the station 24 flow line 30 leads to an embossing station 32 which receives process input along process line 34 from a yet further printing cylinder 36 of said rotogravure printing press, which cylinder 36 is holographically engraved.

Instead, cylinder 36 may carry holographically engraved shims mounted thereon.

Flow line 38 in turn leads from station 32 to a metallising station 40, which receives process input along process line 42 from a vacuum-metalliser 44. From station 40 flow line 46 leads to a laminating station 48 which is supplied along process line 50 with process input from a laminator 52.

Flow line 54 leads from station 48 to a slitting station 56 which receives process input along process line 58 from a slitler 60; and flow line 62 leads from station 56 to a product store 64.

Finally, a supply or store 66 of sealant film, likewise polyester film, is shown feeding along flow line 68 into laminating station 48.

In accordance with the process of the invention a web in continuous strip form, of unprinted polyester film is fed from a roll thereof at the store 12 along flow line 14 to and past the colour-printing station 16 where the web receives, on a portion thereof, a reverse-printed colour coating along process line 18 from cylinder 20. The web then moves on from station 16 along flow line 22 to the embossing coating printing station 24, where it receives, on a different and as yet unprinted portion thereof, a reverse-printed embossing coating, along process line 26 from cylinder 28.

The web then moves on from station 24 along flow line 30 to embossing station 32, where, on the portion printed with embossing coating, it is reverse-printed with holographic embossing by process input along line 34 from

engraved cylinder 36. The web then moves on along line 38 to the metallising station, where the entire printed surface thereof receives a reverse-printed metallising coating along process line 42 from the metalliser 44.

The web then moves on from station 40 along flow line 46 to the laminating station 48 where it receives laminating process input from laminator 52 along process line 50, being laminated at station 48 to a web of polyester laminating film, moving from store 66 along flow line 68 to station 48. The laminated web then moves on along flow line 54 to slitting station 56 where it receives slitting process input from the slitter 60 along process line 58, and is longitudinally slit into longitudinally extending portions. Finally, the slit portions move along flow line 62 to the store 64 via a rolling station (not shown) where process input is provided which rolls the laminated film slit portions into rolls, which rolls move along line 62 to the store 64.

With regard to the foregoing, it should be noted that the process of the present invention illustrated in the drawings is a continuous (not batchwise) in-line process, with regard to the colour-printing, the printing with embossing coating, and the embossing in which the web of film from the store 12 is moved as a continuous web, either continuously or intermittently, as far as the embossing station 32. Thereafter, in the embodiment illustrated in the drawing, the succeeding process steps are carried out batchwise on the web, with regard to the metallising, the laminating, the slitting and the rolling.

It should further be noted that flow lines 14, 22, 30, 38, 46, 54, 62 and 68 are flow lines along which the webs move from stores 12 and 66, either separately

or together after lamination thereof, from one process station to another, the colour-printing, embossing coating printing and embossing process stations respectively 16, 24 and 32 being arranged in-line. In contrast, the process lines 18, 26, 34, 42, 50 and 58 are not intended necessarily to indicate material flow, but rather the application of process input or process steps at the various stations, by the plant or equipment associated with the respective stations, to the web passing to and past the stations. There will naturally be a flow of colour-printing material associated with line 18, a flow of embossing coating material associated with line 26, and a flow of metallising metal, say aluminium vapour, associated with line 42, but no material flow will take place along any of lines 34, 50 or 58.

An advantage of the process as described above with reference to the drawing, is that it employs an at least partially in-line process in which a holographic coating is applied to a starting film which is then holographically embossed, the printing of the embossing coating and the embossing thereof being applied to only portions of the starting film, where required, and not to the remainder thereof. This has particular advantages compared with a process which employs a pre-holographically embossed starting film, all of which is embossed, including unnecessary holographic embossing on parts of the film intended to be colour-printed where such embossing is wasted. Furthermore, pre-embossed film, apart from being expensive, is generally available in a limited number of different embossed designs. Thus, apart from reducing the expensive embossing, flexibility in the designs used is promoted, particularly when engraved shims are employed on the embossing cylinder. Using a rotogravure press, embossing can be carried out on desired portions of the film and colour-printing can be carried out on other desired portions of the film, in an in-line process of relatively reduced cost having enhanced artistic possibilities. In

particular, it makes possible the embossing of corporate logos or brand names on the product holographically, which can assist in resisting counterfeiting, in particular, of banknotes, and can improve shelf-appeal of packaging made from the film.

CLAIMS:

1. A process for producing printed material comprising an elongated web of flexible sheet material, the process including the process steps of:
printing an embossing coating on at least a portion of a surface of a major face of a web of said sheet material;
embossing the embossing coating printed on said major face by means of an optically variable device; and
metallising at least a portion of said surface of said major face with a metal coating,
the printing and the embossing being carried out in-line and continuously until a desired length of the surface or web has been embossed, the web being advanced past a series of work stations where the in-line process steps are respectively carried out, the series including a printing station where the printing of the embossing coating takes place and an embossing station, following the printing station, where the embossing takes place, to produce a web of flexible sheet material having a major face which is at least partially embossed, at least a portion of said major face being metallised.
2. A process as claimed in Claim 1, in which the printing of the embossing coating is on a portion of said surface of said major face, the metallising being of the entire surface of said major face, to produce a web of flexible sheet material having a major face which is partially embossed, the whole of said major face being metallised.
3. A process as claimed in Claim 1 or Claim 2, in which the flexible sheet material is a transparent flexible polymeric plastics film.

4. A process as claimed in any of Claims 1 to 3 inclusive, which includes the further step of colour-printing said major face of the web, the colour-printing being carried out continuously and in-line with the printing of the embossing coating and in-line with the embossing.
5. A process as claimed in Claim 4, in which the colour-printing is confined to at least one unembossed portion of the surface of said major face.
6. A process as claimed in Claim 4 or 5, in which the colour-printing is by means of a printing cylinder using a gravure printing technique.
7. A process as claimed in Claim 6, in which the colour-printing cylinder forms part of a gravure printing press.
8. A process as claimed in any one of Claims 4 to 7 inclusive, in which the colour-printing is carried out prior to the printing of the embossing coating.
9. A process as claimed in any one of the preceding claims, in which the metallising step and any additional process steps, other than in-line printing and embossing steps, are carried out batchwise.
10. A process as claimed in any one of the preceding claims, in which the embossing by means of an optically variable device is selected from the group consisting of holographic embossing, stereographic embossing, diffraction grating embossing, dot matrix embossing and combinations thereof.

11. A process as claimed in Claim 10, in which the embossing is holographic embossing.
12. A process as claimed in any one of the preceding claims, in which the embossing is such as to provide the embossed web with an at least partially repeating embossed pattern.
13. A process as claimed in any one of the preceding claims, which includes the further process step of laminating the embossed metallised web with a backing web of flexible sheet material, to provide a laminated composite material, in which the embossing, the metal coating and any colour-printing are sandwiched between the webs so that the embossed metallised web is reverse-printed, at least one of the webs being transparent.
14. A process as claimed in any one of the preceding claims, which includes the steps of slitting the embossed metallised web lengthwise into at least two strips, and rolling said strips into rolls.
15. A process as claimed in any one of the preceding claims, in which each said web is made of a polymeric material selected from the group consisting of polyesters, polypropylenes, polyethylenes and polyvinyl chlorides, and mixtures, blends and copolymers thereof.
16. A process as claimed in Claim 15, in which the polymeric material is selected from polystyrenes and polypropylenes, the metallising being by vacuum metallising.

17. A process as claimed in any one of the preceding claims, in which the metallising step is carried out by means of aluminium.
18. A process as claimed in any one of the preceding claims, in which the embossing coating is solvent-based, the embossing coating being printed by means of a printing cylinder.
19. A process as claimed in Claim 18, in which the embossing coating is provided by the printing cylinder using a gravure printing technique, the cylinder forming part of a gravure printing press.
20. A process as claimed in any one of the preceding claims, in which the embossing is by means of an embossing cylinder, carrying a holographically engraved cylindrical surface.
21. A process as claimed in Claim 20, in which the embossing cylinder forms part of a gravure printing press.
22. A process as claimed in any one of the preceding claims, in which the embossing step and each printing step are carried out by separate cylinders forming part of a single gravure printing press.
23. An apparatus or installation for producing printed material, the apparatus or installation comprising a plurality of process stations, the process stations including:
an embossing coating printing station for printing an embossing coating on at

least a portion of a surface of a major face of an elongated web of flexible sheet material;

an embossing station for embossing the embossing coating printed on the web at the printing station; and

a metallising station for metallising at least a portion of said surface of said major face,

the printing station and the embossing station being arranged in-line, and the apparatus or installation being arranged and constructed to advance an elongated web of flexible sheet material in succession past said printing station and said embossing station.

24. An apparatus or installation as claimed in Claim 23, which is arranged and constructed to advance the elongated web of flexible sheet material past the embossing station and then to the metallising station.

25. An apparatus or installation as claimed in Claim 24, which includes at least one colour-printing station, arranged in-line with the embossing coating printing station and the embossing station, for colour-printing a coloured coating on an uncoated portion of the surface of said major face.

26. An apparatus or installation as claimed in any one of Claims 23 to 25 inclusive, in which each processing station, other than said printing stations and embossing station, is arranged for batchwise processing of the web.

27. An apparatus or installation as claimed in any one of Claims 23 to 26 inclusive, in which each printing station and the embossing station form part of a single gravure printing press having a plurality of cylinders, each printing station and the embossing

station being arranged in-line and each comprising one of the cylinders of the press.

28. An apparatus or installation as claimed in any one of Claims 23 to 27 inclusive, in which the metallising station comprises a vacuum-metallising station, for vacuum-metallising the major face.

29. An apparatus or installation as claimed in any one of Claims 23 to 28 inclusive, which includes a laminating station for laminating said major face of the web, after the metallising, to a backing web of flexible sheet material.

30. An apparatus or installation as claimed in any one of Claims 23 to 29 inclusive, which includes a slitting station for slitting the metallised web into portions.

31. An apparatus or installation as claimed in any one of Claims 23 to 30 inclusive, which includes a rolling station for rolling each metallised web or web portion up into at least one roll.

32. A flexible printed material comprising a web of flexible sheet material, whenever produced by the process claimed in any one of Claims 1 to 22 inclusive.

33. A flexible printed material, comprising a web of flexible sheet material, whenever produced by means of the apparatus or installation claimed in any one of Claims 23 to 31 inclusive.

34. A flexible printed material, as claimed in Claim 32 or Claim 33, in which the

web comprises an embossed portion and an unembossed portion which respectively extend continuously along the full length of the web.

35. A flexible printed material, as claimed in Claim 34, in which the embossed portion and unembossed portion are respectively divided into separate parts, the parts being spaced from one another and alternating along the length of the web.

36. A flexible printed material as claimed in Claim 34 or Claim 35, in which the portions are arranged such as to provide the web with at least one repeating pattern.

37. A flexible printed material as claimed in any one of Claims 32 to 36 inclusive, in which the web which is embossed and metallised, and any backing web used, are made from a member selected from the group of polymeric plastics materials consisting of polyesters, polypropylenes, polyethylenes, and polyvinyl chlorides, and mixtures, blends and copolymers thereof.

38. A flexible printed material as claimed in Claim 32 or Claim 33, which is in the form of at least one bank note.

39. A flexible printed material as claimed in any one of Claims 32 to 37 inclusive, which is in the form of a packaging material.


40. A process as claimed in Claim 1, substantially as described and as illustrated herein.

41. An apparatus or installation as claimed in Claim 23, substantially as described

and as illustrated herein.

42. A flexible printed material as claimed in Claim 32 or Claim 33, substantially as described and as illustrated herein.

1/1

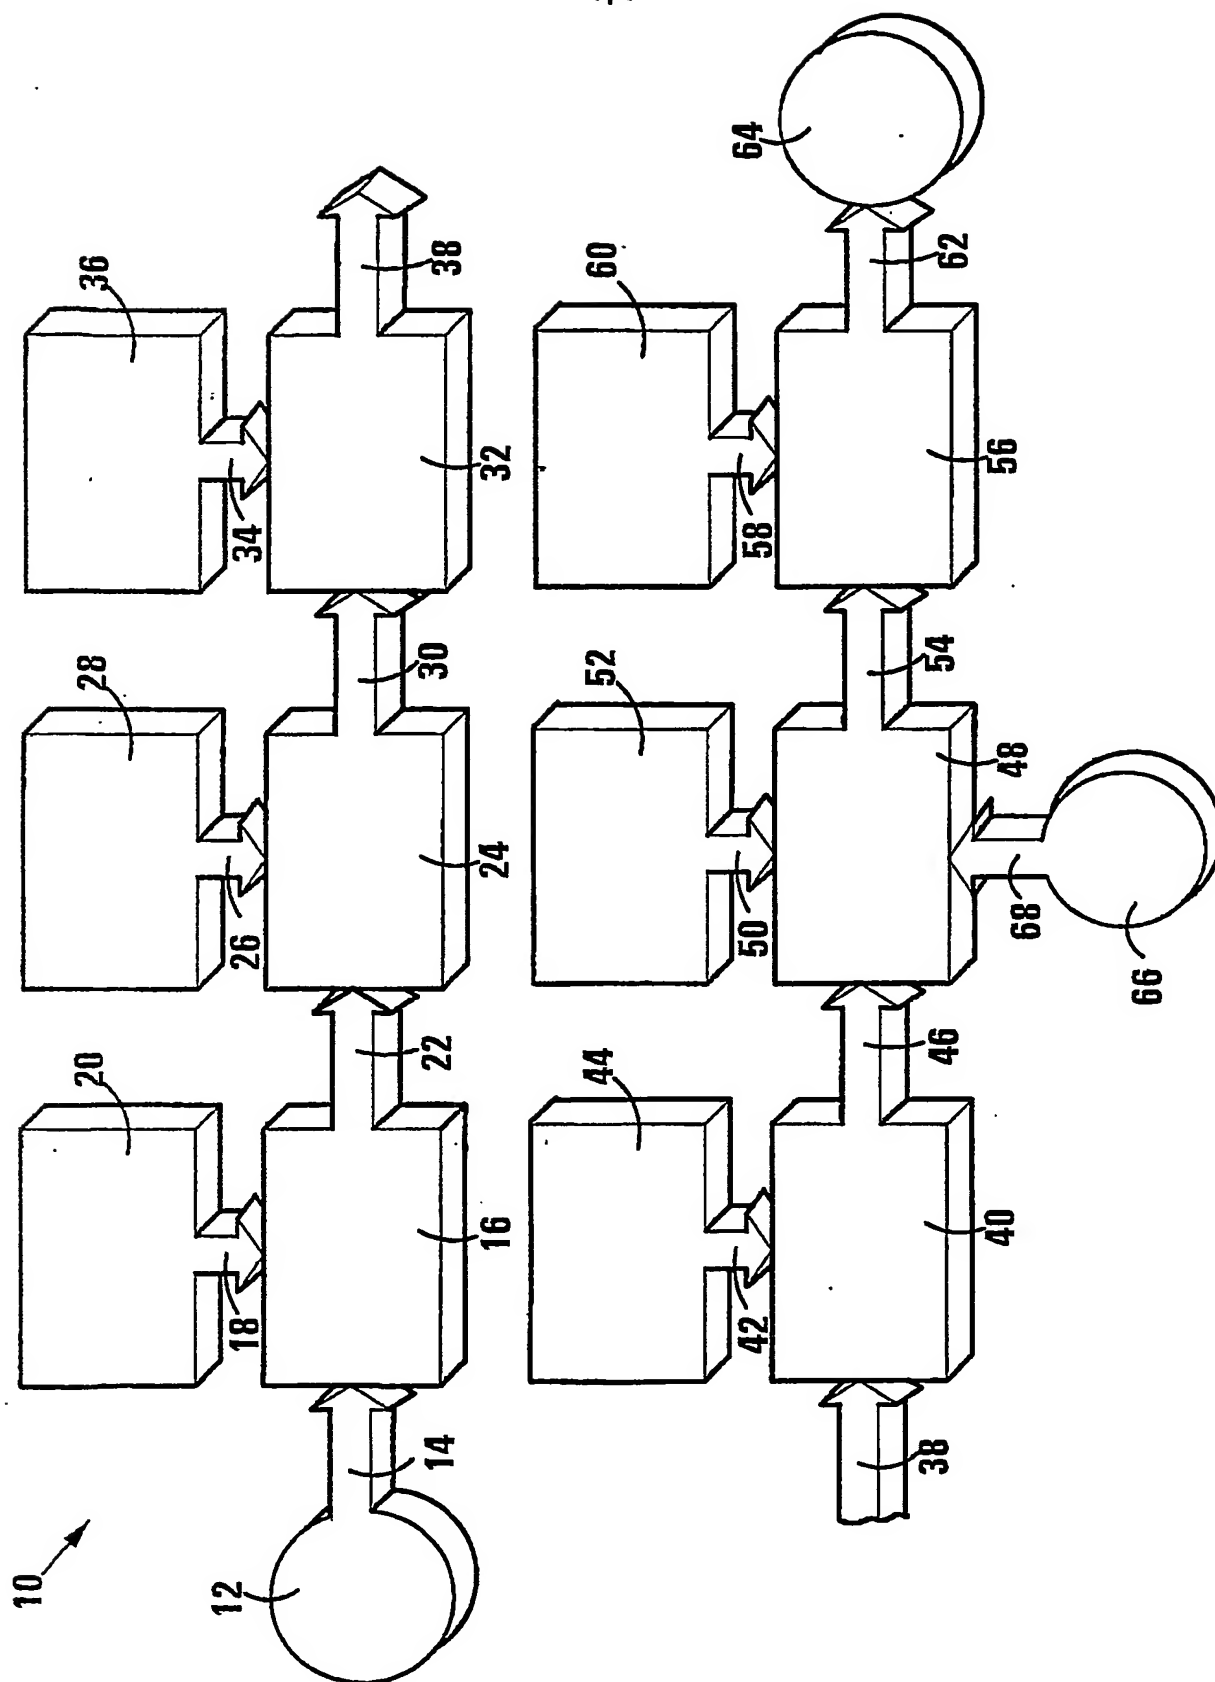

INTERNATIONAL SEARCH REPORT

Int plication No
PCT/IB 03/01977

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B41M1/24 B41M1/00 B41F19/02 B41M3/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B41M B41F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 014, no. 264 (P-1057), 7 June 1990 (1990-06-07) & JP 02 072385 A (TOPPAN PRINTING CO LTD), 12 March 1990 (1990-03-12)	1-5, 10, 11, 32-35, 40, 42
A	abstract	6-9, 12-31, 36-39, 41
A	PATENT ABSTRACTS OF JAPAN vol. 014, no. 274 (P-1061), 13 June 1990 (1990-06-13) & JP 02 081082 A (TOPPAN PRINTING CO LTD), 22 March 1990 (1990-03-22) abstract --- -/--	1-42

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

3 September 2003

Date of mailing of the international search report

16/09/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Balsters, E

INTERNATIONAL SEARCH REPORT

In application No

PCT/IB 03/01977

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 238 516 A (VAN DER LAAN EDWARD J ET AL) 24 August 1993 (1993-08-24) column 1, line 53 -column 3, line 41; figures 1-4	1-42
A	US 5 549 774 A (FOTLAND RICHARD A ET AL) 27 August 1996 (1996-08-27) column 1, line 13 -column 3, line 57; figure 4	1-42
A	US 6 372 073 B1 (WEDER DONALD E) 16 April 2002 (2002-04-16) column 4, line 25 -column 5, line 35; figure 3	1-42

INTERNATIONAL SEARCH REPORT

Int application No

PCT/JP 03/01977

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 02072385	A	12-03-1990	NONE
JP 02081082	A	22-03-1990	NONE
US 5238516	A	24-08-1993	NL 8902949 A 17-06-1991 AT 111240 T 15-09-1994 AU 6953191 A 26-06-1991 CA 2067731 A1 30-05-1991 DE 69012344 D1 13-10-1994 DE 69012344 T2 16-03-1995 DK 502111 T3 17-10-1994 EP 0502111 A1 09-09-1992 ES 2051662 T1 01-07-1994 JP 5504417 T 08-07-1993 WO 9108524 A1 13-06-1991 NO 922083 A 26-05-1992
US 5549774	A	27-08-1996	AU 4242393 A 13-12-1993 DE 69329662 D1 14-12-2000 DE 69329662 T2 09-08-2001 EP 0678074 A1 25-10-1995 WO 9323251 A1 25-11-1993 US 5629068 A 13-05-1997
US 6372073	B1	16-04-2002	US 2002166622 A1 14-11-2002 US 2002166623 A1 14-11-2002 US 2002170656 A1 21-11-2002 US 2002170659 A1 21-11-2002 US 2002179231 A1 05-12-2002 US 2002192568 A1 19-12-2002 US 2003029548 A1 13-02-2003 US 2003029082 A1 13-02-2003 US 2003029083 A1 13-02-2003 US 2003037862 A1 27-02-2003 US 2003037863 A1 27-02-2003 US 2003037864 A1 27-02-2003 US 2003000626 A1 02-01-2003 US 2003000627 A1 02-01-2003 US 2002195192 A1 26-12-2002 US 2003000136 A1 02-01-2003 US 2003000628 A1 02-01-2003 US 2002195193 A1 26-12-2002 US 2003000629 A1 02-01-2003 US 2003000630 A1 02-01-2003 US 2003008107 A1 09-01-2003 US 2003005630 A1 09-01-2003 US 2003005631 A1 09-01-2003 US 2003000631 A1 02-01-2003 US 2003010428 A1 16-01-2003 US 2003000137 A1 02-01-2003 US 2003104179 A1 05-06-2003 US 6444072 B1 03-09-2002 US 6432244 B1 13-08-2002 US 6454895 B1 24-09-2002 US 6461463 B1 08-10-2002 US 2003024631 A1 06-02-2003 US 2003029554 A1 13-02-2003 US 2003029549 A1 13-02-2003

INTERNATIONAL SEARCH REPORT

Int. Application No
PCT/IB 03/01977

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6372073	B1	US 2003029550 A1	13-02-2003
		US 2003029551 A1	13-02-2003

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.